



# LINK SERIES

## LINKABLE SLIMLINE LED LIGHTS

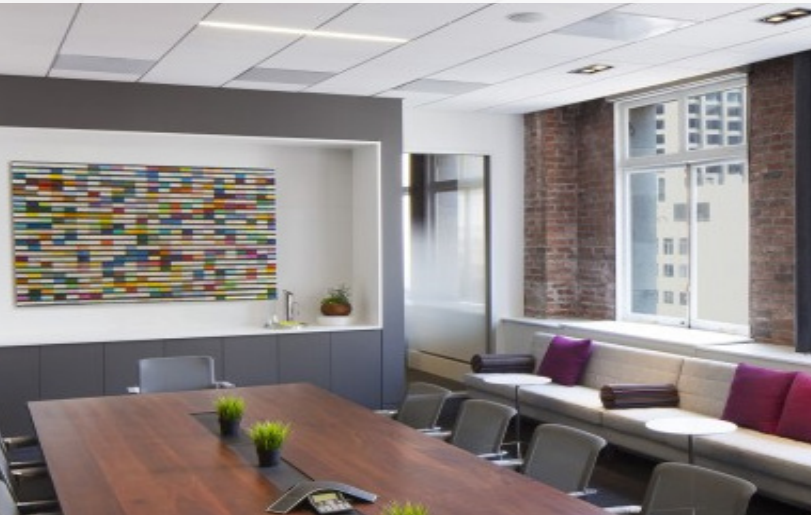

LINK1A-8A

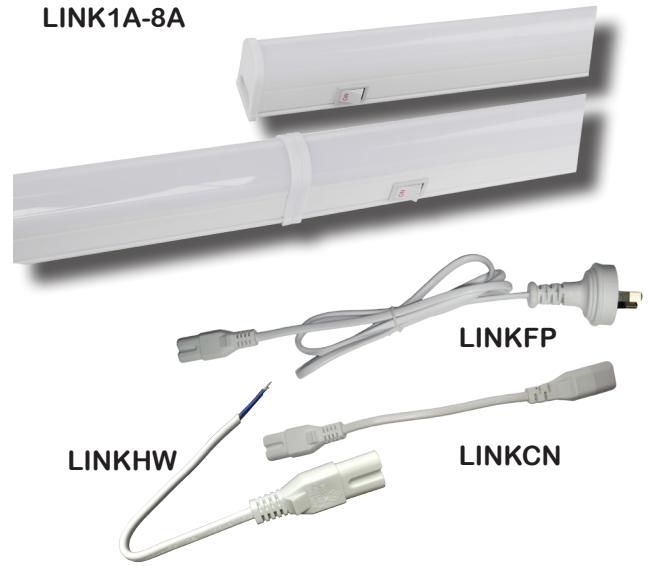


General Lighting

### PRODUCT FEATURES


- Input voltage: 220-240V AC 50/60Hz
- Material: Polycarbonate
- LED chips: 2835 LED
- Power factor: LINK1A-2A: 0.5, LINK3A-8A: 0.9
- Ambient temperature: -20 to 40°C
- Comes with end cap and mounting brackets
- Not suitable for dimming
- Suitable for use with sensors
- Flex & plug and connecting cables sold separately




LINK1A&2A



LINK3A&4A



LINK5A&6A



LINK7A&8A

CODE	DESCRIPTION	KELVIN	LUMENS	WATT	CRI	LEDs	DIMENSIONS	CARTON QTY
LINK1A	LINKABLE LED SLIM 4W 3000K 322MM	3000K	300LM	4	80	21pcs	322x35x26mm	1/25
LINK2A	LINKABLE LED SLIM 4W 5000K 322MM	5000K	350LM	4	80	21pcs	322x35x26mm	1/25
LINK3A	LINKABLE LED SLIM 8W 3000K 587MM	3000K	600LM	8	80	42pcs	587x35x26mm	1/25
LINK4A	LINKABLE LED SLIM 8W 5000K 587MM	5000K	650LM	8	80	42pcs	587x35x26mm	1/25
LINK5A	LINKABLE LED SLIM 12W 3000K 887MM	3000K	900LM	12	80	64pcs	887x35x26mm	1/25
LINK6A	LINKABLE LED SLIM 12W 5000K 887MM	5000K	1000LM	12	80	64pcs	887x35x26mm	1/25
LINK7A	LINKABLE LED SLIM 15W 3000K 1187MM	3000K	1200LM	15	80	84pcs	1187x35x26mm	1/25
LINK8A	LINKABLE LED SLIM 15W 5000K 1187MM	5000K	1300LM	15	82	84pcs	1187x35x26mm	1/25
LINKCN	22cm CONNECTING CABLE FOR LINK1A-8A (SOLD SEPARATELY)							
LINKFP	FLEX & PLUG 2 PIN 1.2m CABLE FOR LINK1A-8A (SOLD SEPARATELY)							
LINKHW	HARD WIRE LEAD 20cm FOR LINK1A-8A (SOLD SEPARATELY)							

**Note: All linkable models can be used together. Maximum connections 150W.**

UPDATED ON 29.10.2018

Tel: (02) 9938 7100 | Fax: (02) 9938 7115 | Email: sales@clalighting.com.au

Website: www.clalighting.com.au



Follow us: facebook.com/CLALighting