


1772-LX


Allen Bradley PLC – PLC 5

| Technical Specifications: | |
|-------------------------------|--|
| Manufacturer | Rockwell Automation |
| Brand | Allen-Bradley |
| Part Number/Catalog No. | 1772-LX |
| Module Type | Mini Processor |
| Backplane Requirement | 1.25 Amperes at 5 Volts DC |
| Amperes | 0.80/0.40 |
| Hertz | 50/60 |
| Output | 4 Amperes at 5 Volts DC |
| Screw Torque | 7-9 lb*in |
| Typical Application | 10-32 Volts DC, Digital |
| Weight | 0.3 lbs (0.1 kg) |
| Coating | Conformal Coat |
| Required External Power | None |
| Typical AC Signal Delay (Off) | 29 (+/- 8) ms |
| Typical DC Signal Delay (Off) | 30 (+/- 7) ms |
| Wiring Arm | 1771-WN |
| Dimensions | 4.5 x 12.4 x 6.3 in (115 x 317 x 160 mm) |

DO Supply Inc. DOES NOT WARRANT THE COMPLETENESS, TIMELINESS OR ACCURACY OF ANY OF THE DATA CONTAINED on this PDF document. ALL INFORMATION CONVEYED HEREBY IS PROVIDED TO USERS "AS IS." IN NO EVENT SHALL DO Supply Inc. BE LIABLE FOR ANY DAMAGES OF ANY KIND INCLUDING DIRECT, INDIRECT, INCIDENTAL, CONSEQUENTIAL, LOSS PROFIT OR DAMAGE.

Product Images

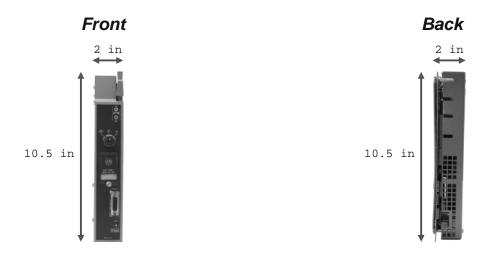

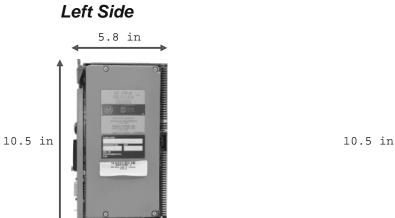





DO Supply Inc. DOES NOT WARRANT THE COMPLETENESS, TIMELINESS OR ACCURACY OF ANY OF THE DATA CONTAINED on this PDF document. ALL INFORMATION CONVEYED HEREBY IS PROVIDED TO USERS "AS IS." IN NO EVENT SHALL DO Supply Inc. BE LIABLE FOR ANY DAMAGES OF ANY KIND INCLUDING DIRECT, INDIRECT, INCIDENTAL, CONSEQUENTIAL, LOSS PROFIT OR DAMAGE.